

Acrylic Impact Modifier AIM-50

Description

AIM-50 is mainly used in PVC window profile, PVC pipe and pipe fitting, PVC fence, PVC siding and decking, PVC panel, etc.

Key property

- Promote fusion
- Improve impact strength
- Improve weather-resistance

Specification

Specification	Unit	Test standard	AIM-50
Appearance	--	--	White powder
Bulk density	g/cm ³	GB/T 1636-2008	0.45±0.10
Sieve residue (30 mesh)	%	GB/T 2916	≤2.0
Volatile content	%	ASTM D5668	≤1.00


Package

20kg/bag with PP bag and PE inner or Kraft paper bag.

550kg/bag Woven bag.



20kg/bag with PP bag

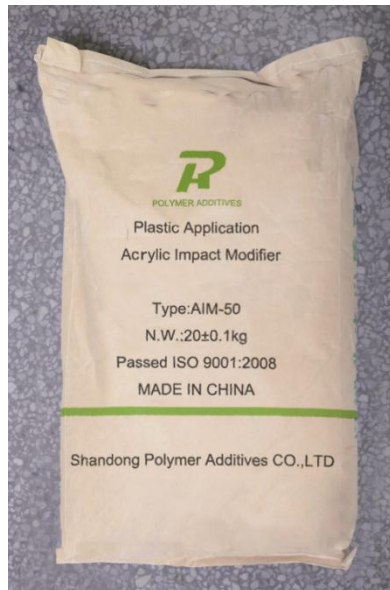

20KG Kraft paper bag.

For 20 container, we can load 11.2mt with pallets. 14mt without pallets.

For 40 container, we can load 22.4mt with pallets. 26mt without pallets.

Storage

The product should be stored in cool and dry surroundings.

The shelf life is two years, it can be still used if qualified by inspection after shelf life.

Contact information

Business Affairs and Complaints

Mr. Clinton Chen **E-mail:** info@pvcadd.com

Technical Support

Mr. Johnson Wang **E-mail:**

tech@pvcadd.com

Sales

Mrs. Alice Tsing **E-mail:**

service@pvcadd.com

Quality Complaints

Mr. James Jiang **E-mail:** com@pvcadd.com

Revision editor: Ms. Yanli Ma

Audit review: Mr. Johnson Wang

Revision date: NOV 22th, 2017