


## SPECIFICATION of HONEYCOMB DEHUMIDIFIER

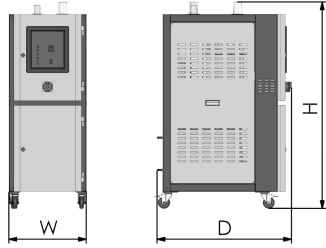


HD-200F

- Suitable to dry material such as PA, PC, PBT, PET, ABS
- This series adopts P.I.D temperature control system, it can precisely control regeneration temperature
- Equipped with over-temperature protection, motor overload protection, reverse phase alarming protective function
- The inner is equipped with return air filter to ensure runner from raw material hives dust pollution
- Optional: Dew Point Meter, One-to-Two master machine function

SPECIFICATION	MODEL	HD-400F	HD-600F	HD-800F	HD-1000F
LOWEST DEW POINT		-40°C			
DRY AIR CAPACITY		400 m <sup>3</sup> /h	600 m <sup>3</sup> /h	800 m <sup>3</sup> /h	1000 m <sup>3</sup> /h
REGEN HEATER POWER		7.5 kW	10 kW	12.5 kW	15 kW
BLOWER POWER		4 kW	5.5 kW	8.5 kW	12.5 kW
REGEN BLOWER POWER		0.7 kW	1.3 kW	1.6 kW	2.2 kW
PIPE DIAMETER		3"	4"	5"	5"
WEIGHT		420 kg	500 kg	600 kg	660 kg
<b>EXTERNAL DIMENSION</b>					
	H.	1800 mm	2100 mm	2230 mm	2230 mm
	W.	750 mm	1060 mm	1120 mm	1310 mm
	D.	1280 mm	1390 mm	1510 mm	1510 mm

Installation option:

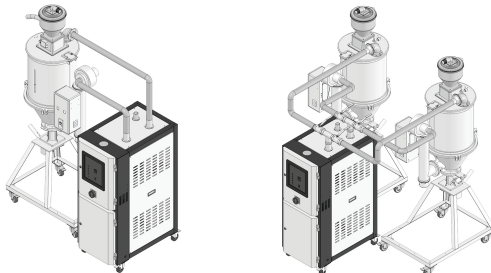

\*Note:

Please provide the length of the air hose to be connected. Please also provide the fan inlet and elbow outlet installation dimension when supporting other brand's dryer. The standard voltage is 3Phase, 380V, 50Hz.

**We reserve the right to change specifications without prior notice. For special needs please let us know!**