


## SPECIFICATION of HOPPER DRYER

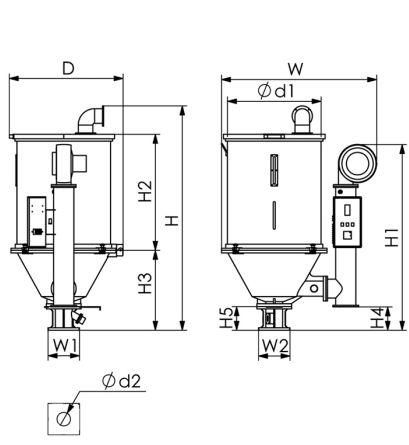

HHD-50HL

- Uniform hot air distribution, which increase the drying efficiency
- Equipped with all digital P.I.D controller
- Hopper and all the parts are stainless steel
- Hopper and lower part can be separated to facilitate maintenance and material change
- Equipped with over temperature protection which can avoid any accidents caused by human or mechanical failures
- HL type is equipped with main power switch, over temperature protection, LCD screen controller & weekly timer
- Optional: HLINK Networking, Double-layer insulation cylinder, Exhaust air filter/ Fan inlet filter/ Magnetic Base/ Magnetic frame/ Hot air recycling/ Ground frame/ Mobile collection bin/ Suction box

SPECIFICATION	MODEL	HHD-12E	HHD-200E	HHD-300E	HHD-400E
LOADING CAPACITY		12 kg	200 kg	300 kg	400 kg
HEATING POWER		2.1 kW	10 kW	15 kW	20 kW
BLOWER POWER		0.14 kW	0.75 kW	0.75 kW	0.75 kW
WEIGHT		20 kg	120 kg	150 kg	215 KG
<b>EXTERNAL DIMENSION</b>					
	H.	820 mm	1685 mm	1855 mm	1995 mm
	H1.	690 mm	1415 mm	1560 mm	1630 mm
	H2.	380 mm	840 mm	935 mm	1035 mm
	H3.	325 mm	605 mm	685 mm	710 mm
	H4.	45 mm	205 mm	215 mm	205 mm
	H5.	110 mm	200 mm	210 mm	210 mm
	D.	430 mm	860 mm	935 mm	1015 mm
	Ød1.	300 mm	700 mm	760 mm	835 mm
	Ød2.	42 mm	115 mm	120 mm	120 mm
	W.	600 mm	1200 mm	1305 mm	1410 mm
	W1.	110 mm	230 mm	280 mm	320 mm
	W2.	110 mm	230 mm	280 mm	320 mm

\*Note:

The above loading capacity is based on the particle diameter 3-5 mm with bulk density about 0.65 kg/L standard plastic raw materials version. The standard voltage is 3Phase, 380V, 50Hz.

**We reserve the right to change specifications without prior notice. For special needs please let us know!**