

INTRAPACT T 50

- Description** : Impact modifier masterbatch for Polyolefin
- Application** : Blown Film, Extrusion, Injection
- Carrier Resin** : Polyolefin Copolymer
- Addition Level** : 1 – 5 %

Physical properties :

Item	Test Method	Unit	Product Specification
Melt Flow Index	ASTM D – 1238 (190°C / 2.16 kg)	g / 10 min	1 – 8
Specific Gravity	JIS K 7112	-	0.80 – 0.90
Moisture Content	ASTM D 6980-12	%	< 0.1
Appearance	visual	-	Translucent pellet

Packaging

INTRAPACT T 50 is supplied in pellet form, in 25 kgs double layered bags, consisting of plastic PE bag as inner layer and PP woven laminated paper bag as outer layer.

Storage


INTRAPACT T 50 should be stored in a dry environment. Opened bag should be kept tightly to prevent contamination of the product.

03/VII/21/PACT T 50

These suggestion and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of utilization of our products are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale.

Testing Method : IZOD Impact (ASTM D-256)

Base Resin : Homo-Polymer PP (MFR: 10 g/10min)

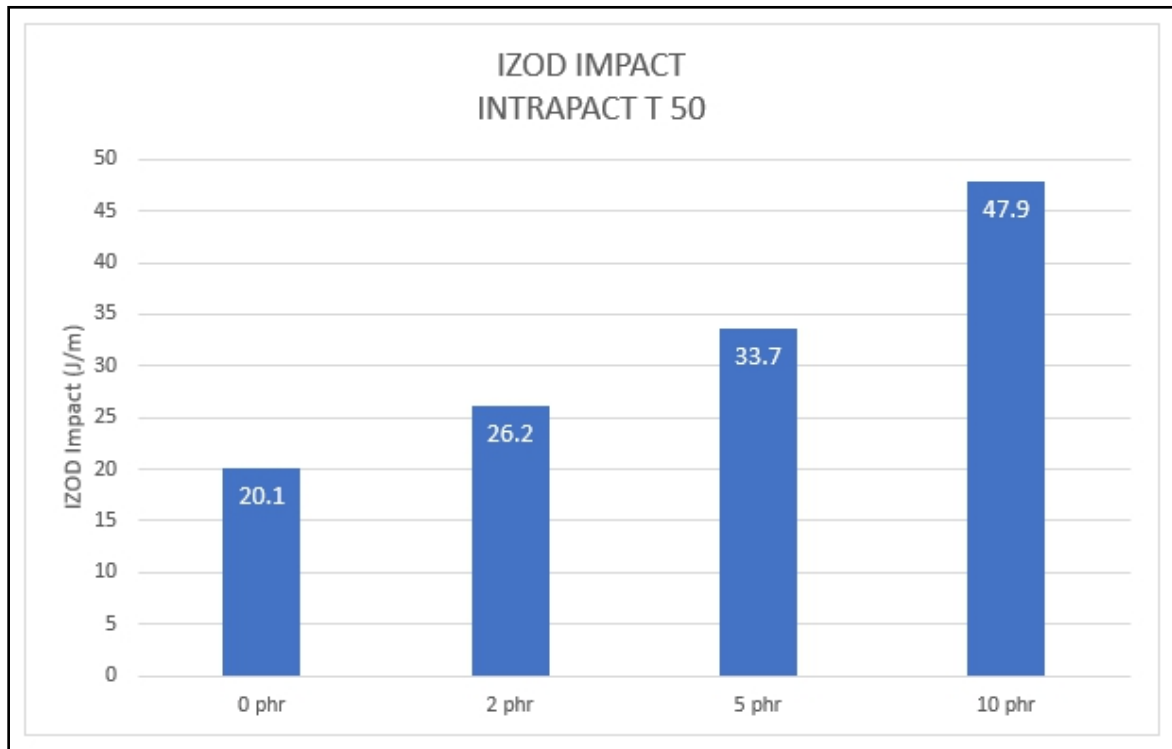

Disclaimer: These suggestion and data are based on information we believe to be reliable, based on our present state of knowledge. They are offered in good faith, but without guarantee, as conditions and methods of utilization of our products are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale to ensure that the product is suitable, safe, effective, and fully satisfactory for any particular application and intended use.