

## CALCIUM CARBONATE


TOP QUALITY - BEST SERVICES

TECHNICAL DATA SHEET

### CALCIUM CARBONATE POWDER

ITEM CODE: SPC 15S (UNCOATED)

<b>BRIEF DESCRIPTION</b>	Natural Calcium Carbonate powder. Manufactured from superwhite and high purity limestone/calcium carbonate; produced by Hight most advanced technological plants.		
<b>PRODUCT SPECIFIC SPECIFICATION</b>	Particle size, Fineness (ISO 13320) (See the particle size distribution from Mastersizer 3000E)		
	Median size: D50	6.6 ± 0.5 μm	
	Top cut: D98	47 ± 3 μm	
	Specific Surface Area	600 ± 50 m <sup>2</sup> /kg	
	Volume below 2 micron	13 ± 1 %	
	Brightness (ISO 2469/70):	89.00 %	Min
	Whiteness Index CIE (ISO 2469/70):	80.50 %	Min
	Moisture (ISO 787/2):	0.25 %	Max
	Density (Raw Material):	2.72 g/cm <sup>3</sup>	
	Oil Absorption (ISO 787/5):	12 g/100g	Max
<b>CHEMICALS ANALYSIS OF RAW MATERIAL</b>	CaCO <sub>3</sub> content:	99.46 %	
	MgCO <sub>3</sub> content:	0.40 %	
	Fe <sub>2</sub> O <sub>3</sub> content:	0.01 %	
	Al <sub>2</sub> O <sub>3</sub> content:	< 0.01 %	
	SiO <sub>2</sub> content:	0.01 %	
<b>PACKING</b>	25 kg, 40 kg PP Woven Bag.		
<b>MAIN APPLICATIONS</b>	Widely used as an extender in paints, in particular matte emulsion paint or a filler in plastics, a mixture in plastic, paint, paper, rubber, glass, and porcelain of high quality and high-grade products; and other applications in industry.		

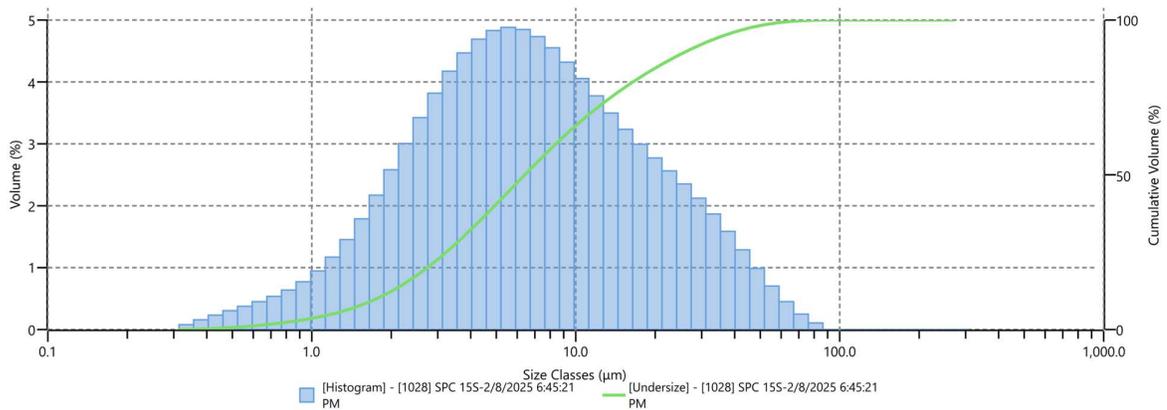

Note: Our products of CaCO<sub>3</sub> powder are tailored to your demands in terms of particle size and fineness. The technical information is submitted based on our own testing and the testing of independent laboratories, and we believe it is accurate. However, no guarantee of its accuracy is made neither can we cover every possible application of our products, nor can we anticipate every variation encountered in manufacturing equipment and methods.