CALCIUM CARBONATE

TOP QUALITY - BEST SERVICES

TECHNICAL DATA SHEET

ULTRAFINE CALCIUM CARBONATE POWDER

ITEM CODE: SWR 8N (UNCOATED)

BRIEF DESCRIPTION Natural Ultrafine Calcium Carbonate powder. Manufactured from

very white and high purity limestone/calcium carbonate;

produced by Hight most advanced technological plants.

PRODUCT SPECIFIC SPECIFICATION Particle size, Fineness (ISO 13320)

(See the particle size distribution from Mastersizer 3000E)

 $\begin{array}{lll} \mbox{Median size: D50} & 3.6 \pm 0.2 \ \mu \mbox{m} \\ \mbox{Top cut: D98} & 12 \pm 1 \ \mu \mbox{m} \\ \mbox{Specific Surface Area} & 900 \pm 50 \ \mbox{m}^2 \slash \mbox{kg} \end{array}$

Volume below 2 μ m 24 \pm 2 %

 Brightness (ISO 2469/70):
 92.00 %
 Min

 Whiteness Index CIE (ISO 2469/70):
 87.00%
 Min

 Moisture (ISO 787/2):
 0.25 %
 Max

Density (Raw Material): 2.72 g/cm³

Oil Absorption (ISO 787/5): 19 g/100g Max


Al₂O₃ content: < 0.01%SiO₂ content: 0.01%

PACKING 25 kg PP Woven Bag.

MAIN APPLICATIONS Widely used as an extender in paints, in particular matte emulsion

paint or a filler in plastics, a mixture in plastic, paint, paper, rubber, glass and porcelain of high quality and high-grade products and

other applications in industry.

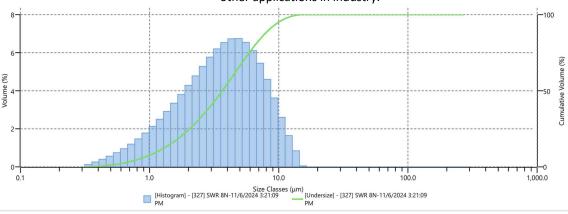

Note: Our products of CaCO3 powder are tailored to your demands in terms of particle size and fineness. The technical information is submitted based on our own testing and the testing of independent laboratories, and we believe it is accurate. However, no guarantee of its accuracy is made neither can we cover every possible application of our products, nor can we anticipate every variation encountered in manufacturing equipment and methods.

Technical Data Sheet: Detailed Specifications of GCC – PT. Supersonic Chemical Industry